



Pre-Wired Receiver

Programming Guide

Technical Features

The Pre-Wired Receiver by Auto Openers allows you to easily upgrade older garage door openers from the AOTX4 remotes, without needing to upgrade the opener itself. As a dual channel receiver, the Pre-Wired Receiver can wire into two different garage door or gate openers at the same time, with over 100 remote controls programmed into the unit at a time.


Remote Coding Method

- 1 Press and release the Learn button. The green or blue LED coding light will illuminate.
- 2 Press and hold the desired button on your remote control, until the coding light begins to flash. Let go of the button.
- 3 Press and hold the same button on your remote control. The coding light will go solid and the receiver will click, signalling the remote control has been programmed into the motor.
- 4 Test the operation of your new remote control. Each time you press a button on the remote control the receiver will click to show it is receiving the code.

Clearing All Remote Controls

- 1 Press and hold the delete button for ten seconds.
- 2 Release the delete button. Test that your remote control no longer operates the receiver.

- Please note, this will clear every remote programmed into the receiver

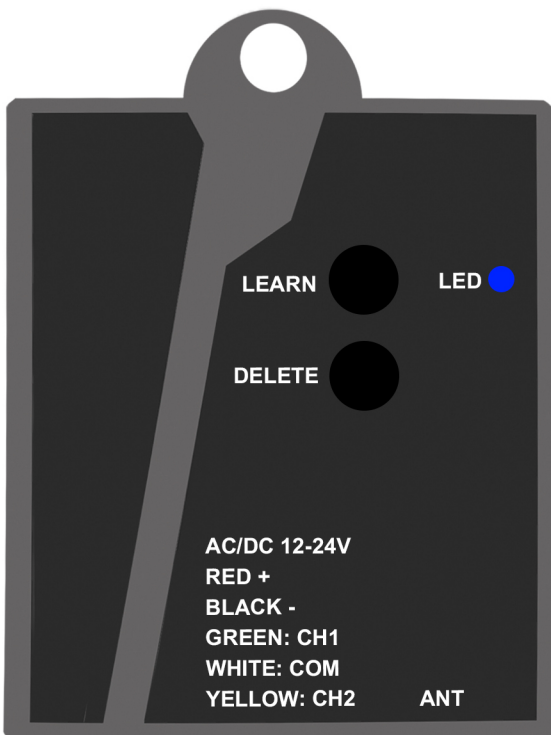

Wiring Key for This Manual

White = Common

Yellow = Channel 2

Green = Channel 1

Red = Positive

Black = Negative